



# G-RGB-DC-ECO-623S-LED-L/R

## Ranger 3 Sec DC Brushless LED Barrier



RANGER



### Motor

DC 24V brushless motor with a stable and reliable transmission system.



### Control System

DC variable-frequency control system-more flexible running, and longer service life.



### Auto Reverse on Obstacle

Arm auto reverse to prevent scratch on vehicle and to avoid injury.

\*All image and specification is subject to change without prior notice.



ARM UP / ARM DOWN  
LED DISPLAY




Straight Telescopic Arm  
>Adjustable >Max 4.5M



Technical Data	G-RGB-DC-ECO-623S-LED-L/R
Product Size	335 x 230 x 975 (mm)
Working Temperature	-35°C~+65°C
Power Supply	DC24V/ AC110V/ 220V 50/60Hz
Running Speed	2.5s~6s
Rated Power	120W
Driving Method	DC Brushless Motor
Humidity	≤ 900%
Remote Control Distance	≤ 100m (Open & Sunny Weather)
Protection Class	IP54
Motor No-load Speed	1850r/min
Adaptable Boom Length	4.5m (Max)


### Ordering Info

Model	Boom Arm Type
G-RGB-DC-ECO-623S-LED-L	Left Arm
G-RGB-DC-ECO-623S-LED-R	Right Arm

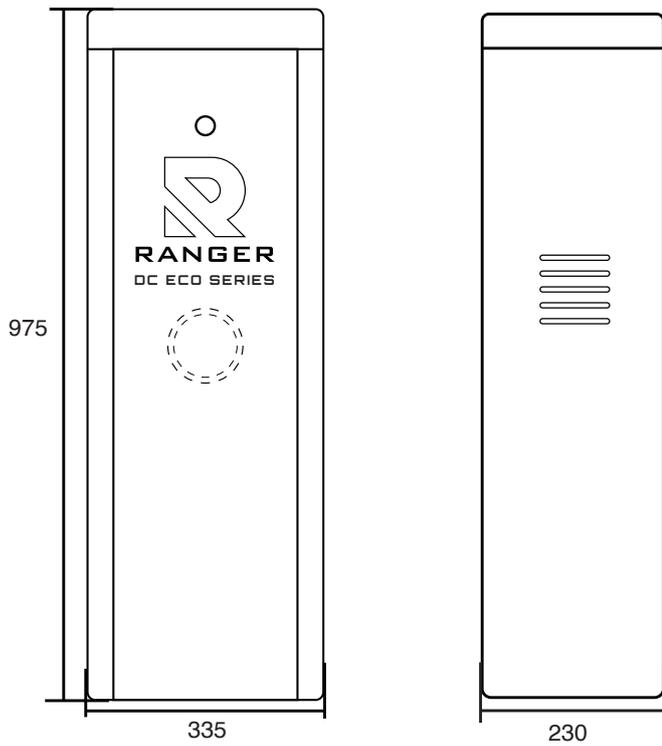

Inner Motor View

\*All specification is subject to change without prior notice.

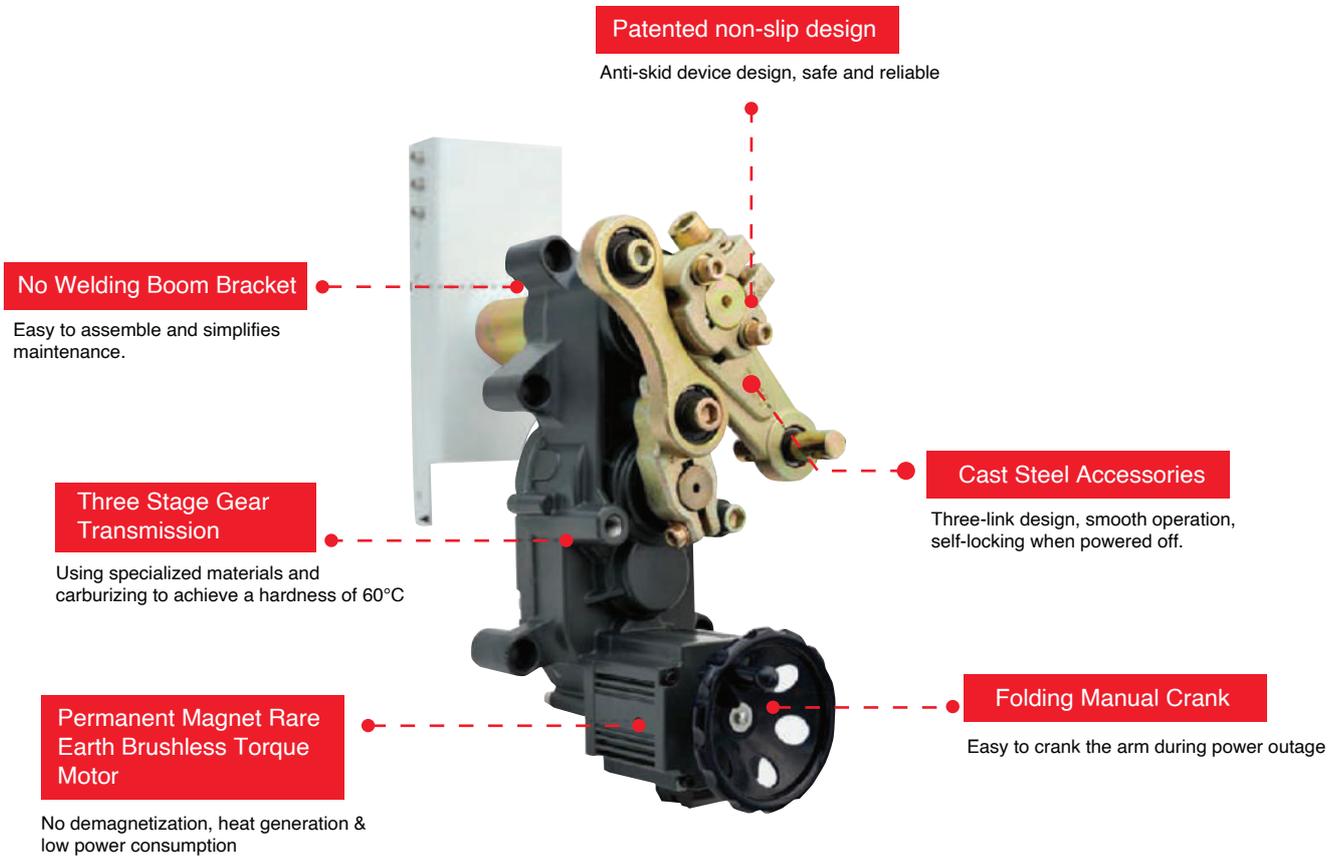



Gooseneck



Loop Detector



Traffic Light



Radar Detector



Long Range Reader




Loop Coil



Photo Cell



Push Button

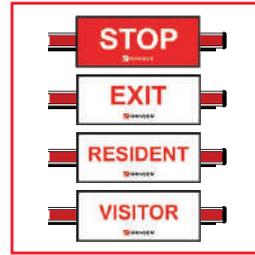

Signboard



Traffic Cone  
& Speed Hump