

DC 36 SERIES

Ranger Sliding Brushed Motor



Anti-Overtravel Protection

Prevent overshooting and resistance protection to stop the motor if limits are damaged.




Automatic Door Closing Function

Closing function can be adjusted(1~ 250 seconds)



Soft Start & Stop Function

Reliable, safe performance and stable operation.

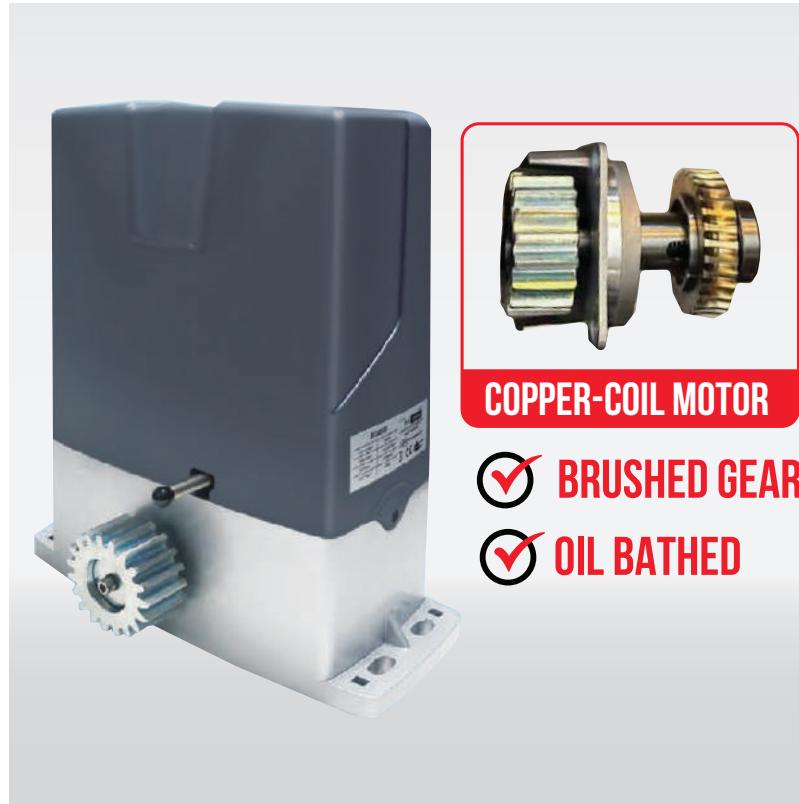

COPPER-COIL MOTOR

✓ BRUSHED GEAR

✓ OIL BATHED

*All image and specification is subject to change without prior notice.

Technical Data	G-SL-DC36-3500-15M	G-SL-DC36-4500-15M
Max. Weight	3500 kg	4500 kg
Working Voltage Input	AC220V/110V ± 10%, Output: DC 36V	
Output Voltage	DC36V	
Fuse	DC 40A	
Remote Control Range Open space	30~90 meters	
Working Temperature	-30°C ~ +65°C	
Torque	80 N.m	107 N.m
Motor Speed	15m/min	
Relative Humidity	<60%	
Rated Power	450W	600W
Protection Class	IP65	
Limit Switch	Spring	

Ordering Info

Model	Model
G-SL-DC36-3500-15M	G-SL-DC36-4500-15M

