




RG-AT35S

Ranger Automatic Swing Door Operator
with Pull Arm (Inward / Outward)




RANGER

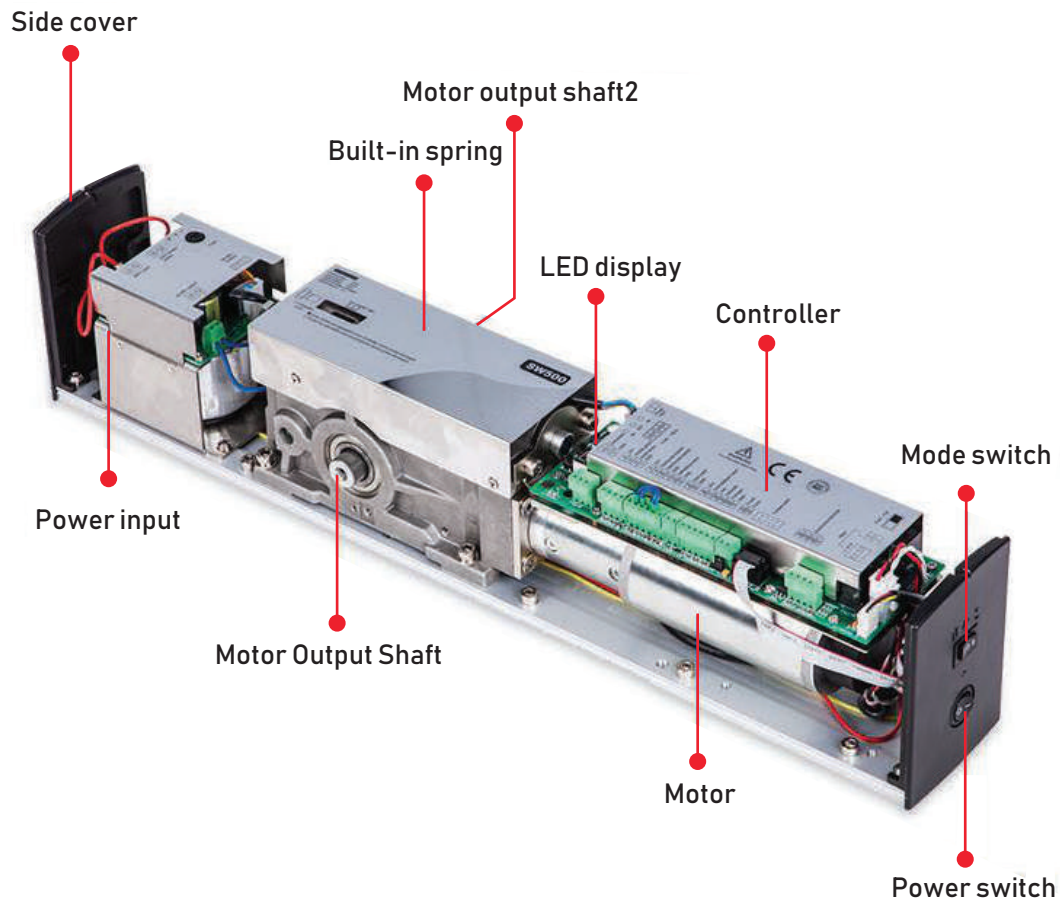


Ranger automatic swing door operator are easy installed, durable, reliable performance, safe and low noise operation. You can transform your any door rapidly into an automatic sliding door without complication. Ranger automatic swing door operator also able to increase convenience and provide barrier-free access for the disabled too.

Ranger automatic sliding door operator highly recommend for application at your living space, working environment etc to make your place more securely.

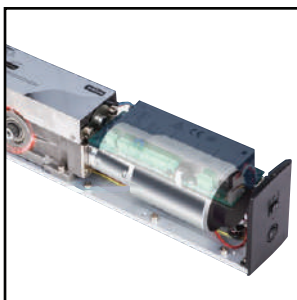

Strong Brush Motor

Adapting strong brush motor with a long service life & larger torque.

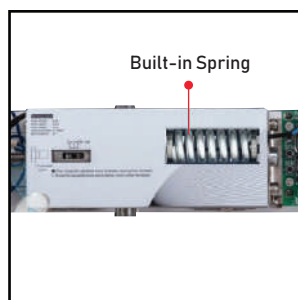


Built-in Spring

According to different door weight, by adjusting the spring tension to close the door automatically when no power.



Wind Resistance

Possess strong resistance to wind pressure, can withstand strong winds and can be used for outdoor.

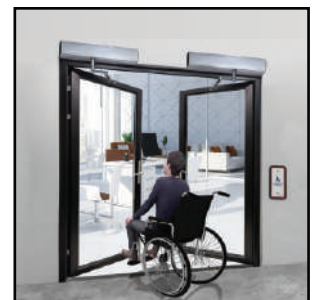

Low Energy Mode

Opening and closing force, speed and Anti-collision force can be reduced for special applications.



RG-AT35S

Ranger Automatic Swing Door Operator
with Pull Arm (Inward / Outward)



RANGER



Strong Brush Motor

Adapting a globally trusted 100W brush motor with the speed of 3600 RPM/min and brand new mechanical components.



Suitable for Special Application

Designed with function of low energy mode to provide convenience to people using it in the medical industries.



Infrared Safety Sensor (Slow Motion Area(45°~105°))

Door can be set moving at low speed when sensor detects wall or reaches certain range.

KG
350

Maximum Door Weight

Maximum support door weight up to 350KG.

*All image and specification is subject to change without prior notice.



Technical Data	RG-AT35S-I	RG-AT35S-O
Door Leaf Weight	350kg	
Open Degree	Max 105°	
Opening Speed	40°/S	
Closing Speed	30°/S	
Opening Time	3-9s(Adjustable)	
Size	610*90*128mm (W*H*D)	
Component Weight	13.5kg	
Working Temperature	-20°C ~ +50°C	
Input Voltage	AC 200V - 240V 50-60Hz	
Output Voltage	24V DC (±10%), 3A	
Large Torque	26.5N.m	
Protection Class	IP21	

Standard Colours



White Aluminium
(Similar to RAL9003)

Ordering Info

Model	Swing Door Configuration
RG-AT35S-I	Inward
RG-AT35S-O	Outward

Included Component

*All image and specification is subject to change without prior notice.



Operator



Extension (33mm)



Pull Bar

OR



Push Bar

Optional Accessories

*All image and specification is subject to change without prior notice.



Wireless Push Button



Safety Beam Sensor



Touchless Sensor



Key Switch



Foot Sensor



Electro Magnetic Lock

