



# RG-BC-XFACE3-PRO

Ranger 2.8" Touch Screen Face Recognition



**RANGER**



Time Attendance



Access Control



AI Dual Camera



Record Query



Live Detection



Touch Screen

\*All image and specification is subject to change without prior notice.





Technical Data	RG-BC-XFACE3-PRO
<b>Capacity</b>	
Faces	1000
Cards	1000
Logs	Max. 150,000 (including 50,000 logs with photos)
<b>Interfaces</b>	
Communication Mode	WIFI
I/O	Relay, Exit Button
<b>Functions</b>	
Upgrade Mode	Online, USB
Software Supported	Standalone, Ustar, Ustar Cloud, Ustar Mobile, Ustar Access, Web Server
<b>Hardware Specifications</b>	
Memory	8GB ROM + 256MB RAM
CPU	CPU@1.5GHz, Linux
Card Modules	Standard EM & MIFARE Card
Screen	2.8-inch TN touch screen, 240*320

## General

Working Temperature	-20°C~60°C
Storage Temperature	-20°C~60°C
Working Humidity	10%~90%
Power Supply	DC 5V/2A
Power Consumption	Max. 10W
Certificates	CE, FCC

## Dimension Drawings (mm)

\*All specification is subject to change without prior notice.

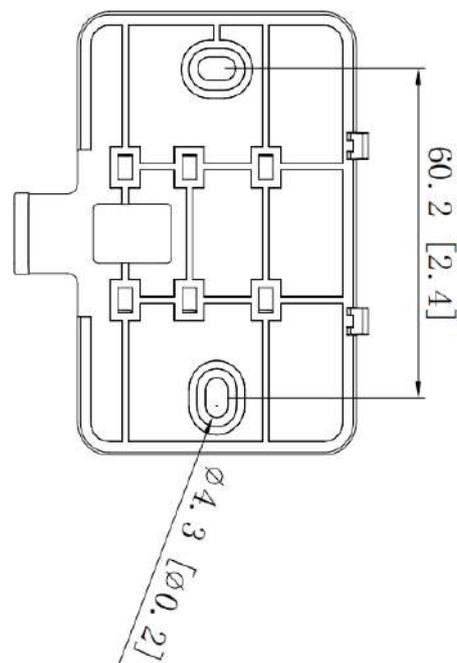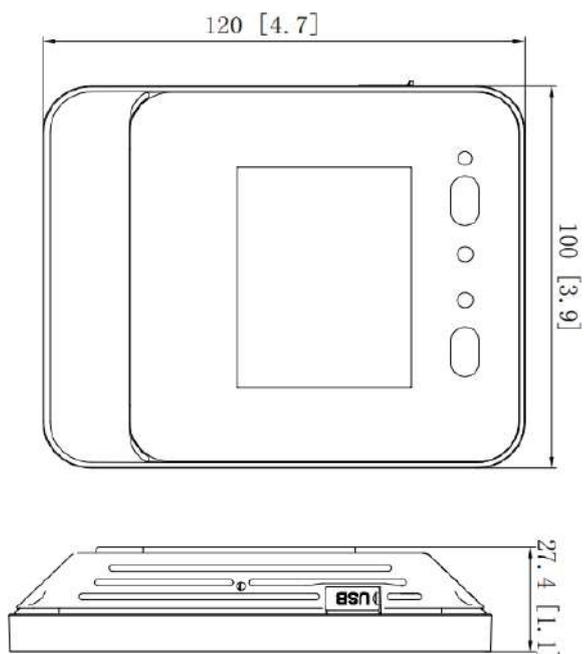

## Ordering Info

### Model

RG-BC-XFACE3-PRO