




RG-BC-XFACE5-PRO

Ranger 2.8" Touch Screen Face Recognition



RANGER



IP65 Waterproof



Access Control



Fingerprint



QR Code



Live Detection



Touch Screen

*All image and specification is subject to change without prior notice.



Technical Data

RG-BC-XFACE5-PRO

Capacity

Faces 10,000

Cards 10,000

Logs Max. 50,000

Interfaces

Communication Mode TCP/IP, WIFI, Bluetooth

I/O Relay, Wiegand input/output, RS232, Door sensor, Exit button, USB

Functions

Face Recognition Live detection

Upgrade Modes Online, USB Online, USB

Software Supported Standalone, Ustar, Ustar Cloud, Ustar Mobile, Ustar Access, Web Server

Hardware Specifications

Memory 512MB RAM + 8GB ROM

CPU Dual-core ARM Cortex-A7@900MHz, Linux

Screen 5-inch TN touch screen

Cameras IR, RGB dual-lens camera, Recognition distance (0.3-2m)


Infrared Fill Light Supported

Card Modules Standard EM & MIFARE Card, NFC

Fingerprint Module 3,000 fingerprints

General	
Working Temperature	-10°C~60°C
Storage Temperature	-20°C~60°C
Working Humidity	10%~90%
Power Supply	DC 12V/2A
Power Consumption	Max. 15W
Dimensions	174mm*84mm*18mm
Certificates	CE, FCC, RoHS

Dimension Drawings (mm) *All specification is subject to change without prior notice.

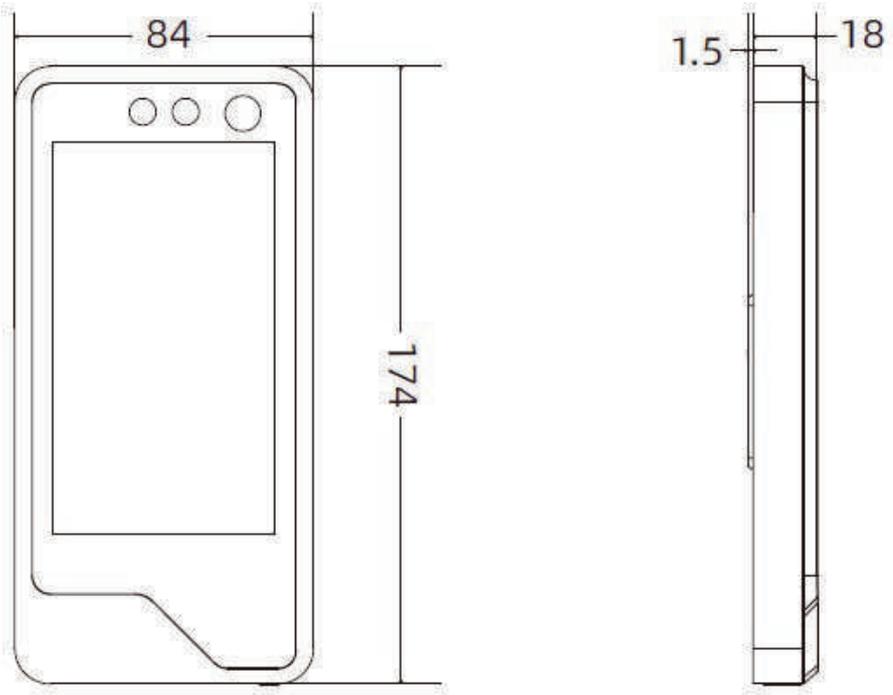

Ordering Info

Model

RG-BC-XFACE5-PRO