




G-SL-3000Z-BLACK

Sliding Gate Motor without Oil Bath



RANGER



Overheating Protection

The motor will be automatically cut off when the temperature reaches the rated value.



Reliable Turbine and Structure

Turbine worm drive transmission structure with smooth transmission.



Safety Auto Shuttering

Auto shuttering back the door against touching, soft start and soft stop.



Convenience Setup

Convenience installation, when power failure can open the clutch, manual opening.

*All image and specification is subject to change without prior notice.



Technical Data	G-SL-3000Z-BLACK
Input Voltage	220V/50Hz
Motor Speed	1400r/min
Output Torque	22N.m
Motor Power	370W
Max Gate Weight	800kg
Gate Speed	12m/min
Limit Switch	Spring Limit Switch (N.O)
Temperature	-40°C ~ +65°C
Noise	≤56dB
Gear Teeth	19T


Standard Colours



Grey Aluminium
(Similar to RAL9007)




Signal Black
(Similar to RAL9004)

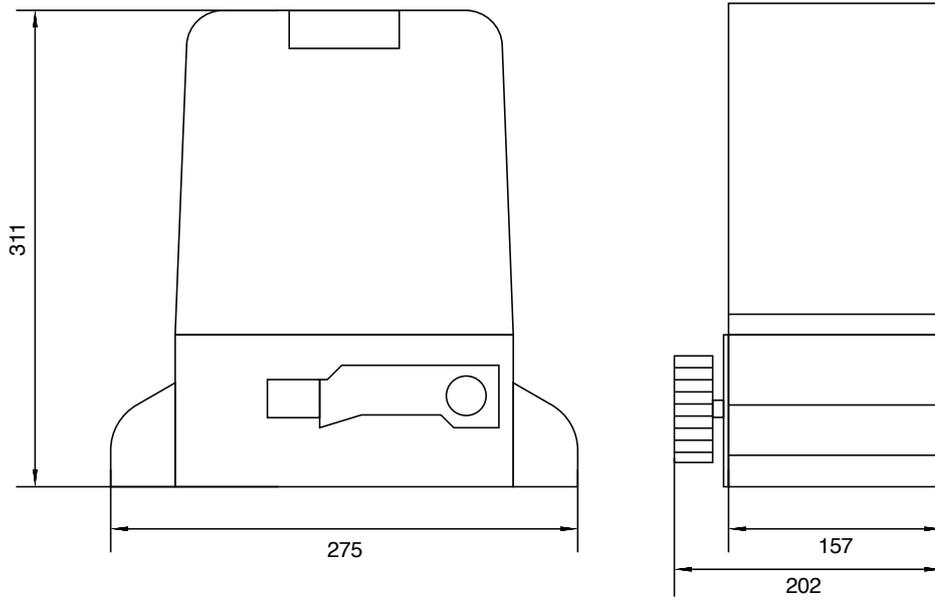



G-SL-3000Z

Sliding Gate Motor without Oil Bath



RANGER
AUTOMATION • REVOLUTION



Overheating Protection

The motor will be automatically cut off when the temperature reaches the rated value.



Reliable Turbine and Structure

Turbine worm drive transmission structure with smooth transmission.



Safety Auto Shuttering

Auto shuttering back the door against touching, soft start and soft stop.



Convenience Setup

Convenience installation, when power failure can open the clutch, manual opening.

*All image and specification is subject to change without prior notice.



Technical Data	G-SL-3000Z
Input Voltage	220V/50Hz
Motor Speed	1400r/min
Output Torque	22N.m
Motor Power	370W
Max Gate Weight	800kg
Gate Speed	12m/min
Limit Switch	Spring Limit Switch (N.O)
Temperature	-40°C ~ +65°C
Noise	≤56dB
Gear Teeth	19T

Standard Colours



Grey Aluminium
(Similar to RAL9007)



Signal Black
(Similar to RAL9004)

