



RG-BC-TFB80

Ranger 8" Face Recognition Time Attendance



RANGER



Supports WIFI/Offline interface



Ultra-low power consumption




Supports 50,000 Face Databases



Wide Dynamic Range

*All image and specification is subject to change without prior notice.

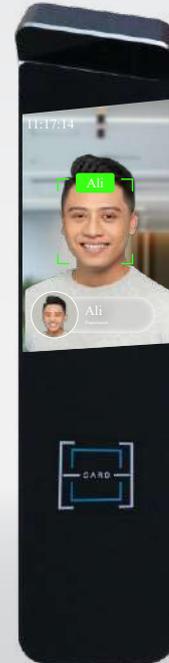

Technical Data	RG-BC-TFB80
Compatible with	RG-TFB325, RG-TFB325-D
Display screen	8-inch high-definition IPS screen
Image size	1280*800
Recognition mode	Portrait recognition, optional functions (QR code recognition, advertisement playback, card swiping (IC + ID))
Recognition type	1:N
Liveness detection	Supported
Portrait database	50,000 images (20,000 people in mask mode)
Access records	The stand-alone device supports 100,000 records
Recognition speed	≤80ms
Recognition distance	0.5-2 meters
Portrait database distribution	Single image, batch images, card swiping registration (optional), platform distribution
Management types	Blacklist, whitelist, temporary users
Output mode	Wiegand 26/34/66, relay
Power supply	DC 12V/2A
Power consumption	≤12W
Working temperature	20°C~+70°C (no condensation)
Working humidity	0%—90%
Device size	132.9 * 260.2*24.1mm (with card function)

Ordering Info

Model

RG-BC-TFB80