



RG-TFH526

Ranger Full Height Single Or Bi-direction Single Turnstile



RANGER



Smooth & Reliable Operation

Stable, low-noise operation.



Flexible Access Control

Supports IC/ID cards, scanning, and face recognition.



Automatic Reset Function

Automatically relocks if no one passes within the set time.






Operating Modes

Supports two-way or one-way access.

*All image and specification is subject to change without prior notice.



Technical Data	RG-TFH526
Size (L*W*H)	1400*1300*2230mm
Pass width	600mm
Power	50W
Material	Body $\delta=1.2\text{mm}$ / fence $\phi=1.0\text{mm}$ SUS304
Movement	Molding full-height turnstile movement
Sensor	Limited sensor
Indicator light	Dynamic indicator light
Drive unit	Anti burn solenoid
Power supply	24V 150W
Control unit	Main board
Communication interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor

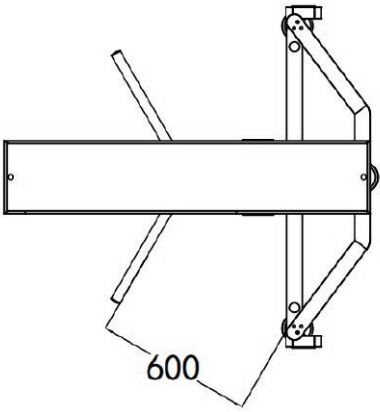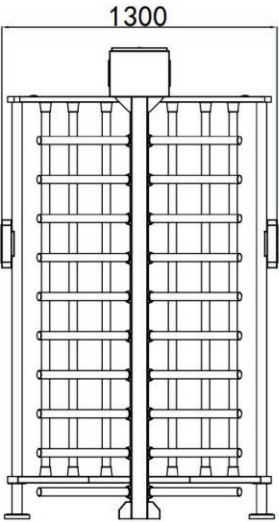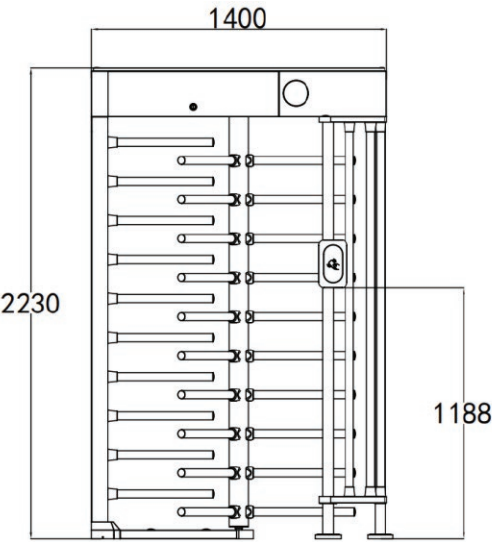

Ordering Info

Model

RG-TFH526